



ENGINEERED FOR TILE FIXING

RECOMMENDED
BY EXPERTS
FOR STRONG GRIP,
UNMATCHED STRENGTH,
SEAMLESS FINISH.



Tile Adhesive | Tile Grout | Epoxy Grout



What is Linum Adhesive?

At Linum, we build more than just products—we build trust. With years of expertise in the construction sector, we understand that every structure stands strong on the foundation of quality. Our journey began with a vision to revolutionize tile adhesives, ensuring seamless bonds that last a lifetime. Guided by innovation and excellence, we craft solutions that enhance durability, strength, and aesthetics, making us a trusted partner for architects, builders, and homeowners alike.

From research to production, every step of our process is driven by precision and passion. Our tile adhesives undergo rigorous testing, ensuring superior bonding, water resistance, and long-term performance. At Linum, we believe in setting new benchmarks, delivering products that uphold our ideals of reliability, efficiency, and sustainability. Because at the heart of every great construction lies an unshakable bond—just like our adhesives.



ADVANCED FORMULATION

**SETTING THE NEW
BENCHMARK OF BONDING**





LN-1

C1E

Tile fixing adhesive for
Internal Wall & Floor applications.

LN-1 is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult **Linum** regarding use of a higher performance adhesive for applications in difficult and demanding situations.

Coverage

This will depend on the nature and lateness of the surface and the method of application but at **3mm** thickness it is **approx. 55-60 sq. ft. per 20kg bag** when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

**Recommended by experts for strong grip,
Unmatched strength, seamless finish.**



LN-2

GREY & WHITE

C2T

Tile fixing adhesive for
**Internal & External
Wall & Floor applications.**

LN-2 is a grey & white, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult **Linum** regarding use of a higher performance adhesive for applications in difficult and demanding situations.

Coverage

This will depend on the nature and lateness of the surface and the method of application but at **3mm** thickness it is **approx. 55-60 sq. ft. per 20kg bag** when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

**Recommended by experts for strong grip,
Unmatched strength, seamless finish.**



LN-3

GREY & WHITE

C2TE


Tile fixing adhesive for
**Internal & External wall &
Floor applications.**

LN-3 is a cement-based adhesive for wall and floor tiles. Suitable for fixing tiles and natural stones in interior and exterior situations which includes swimming pools. This is ideal for fixing tile on tile.

Coverage

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is **approx. 55-60 sq. ft. per 20kg bag** when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

**Recommended by experts for strong grip,
Unmatched strength, seamless finish.**

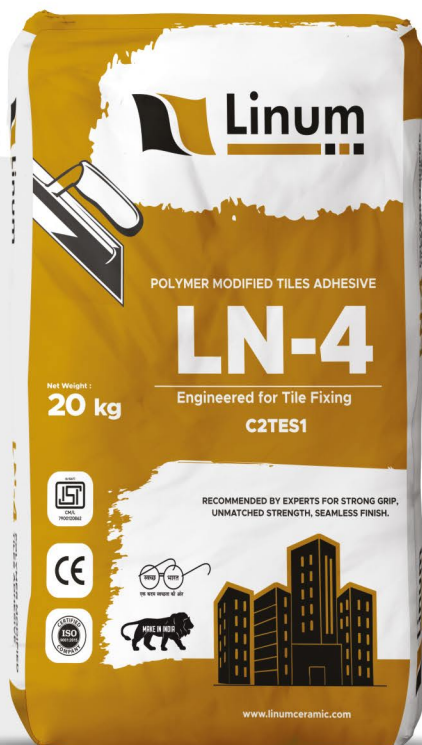

LN-4

GREY & WHITE

C2TES1

Tile fixing adhesive for
**Internal & External wall &
Floor applications.**

LN-4 is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic, glass mosaic etc. It is also suitable for fixing ceramic, vitrified wall & floor tiles, metal or glass tiles, marble, granite, quartz stone, terrazzo and other natural stone in interior and exterior locations which includes use in swimming pools. This is ideal for fixing tile on tile.

Coverage

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is **approx. 55-60 sq. ft. per 20kg bag** when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

**Recommended by experts for strong grip,
Unmatched strength, seamless finish.**



TILE GROUT

One Pack Water Resistant Tile Grout

Linum Tile Grout is a high quality fine, polymer modified, water-resistant, cement – based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc.


(Note: where chemical resistance is hygienic and sterile, it is important use Epoxy Grout)

Shelf Life & Storage

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place.



COLORS



White



Ivory



pink



Magenta



Black



Yellow



O.Green



C.Brown



R.Brown



S.blue



V.Terracotta



B.Beige



Grey



Available in

1kg

Resin +
Hardener +
Filler powder



Epoxy Kit

Stain Proof Grout For Floor & Wall (3 Part) / 100% STAIN FREE

Linum Epoxy is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

Stainfree Grouts

Linum Epoxy is a 100% solid epoxy grout that is stainfree, colour-fast chemical resistant for use with ceramic & vitrified tiles, marble and stone. Linum Epoxy is highly chemical resistant epoxy grout formulated for use with industrial tile, ceramic tile, vitrified tile, pavers, floor bricks & stone.

Coverage

Approximate Sq.ft. Coverage Per 1kg. Epoxy Grout

Tile Size	Joint Width						
	2mm	3mm	4mm	6mm	8mm	10mm	12mm
in mm							
100x100x3mm	52	35	26	18	13	11	9
150x160x4mm	58	39	29	20	15	12	10
200x150x5mm	52	35	27	18	13	11	9
150x300x6mm	62	41	31	20	16	13	11
300x300x6mm	78	52	39	26	20	16	13
450x300x7mm	81	54	40	27	20	16	13
600x450x8mm	101	67	50	34	25	20	17
600x600x8mm	118	78	59	39	29	23	19
600x900x11mm	103	68	51	34	25	20	17
900x900x12mm	118	78	59	39	29	23	19

Recommended For

- Ceramic floor & wall tile
- Porcelain tile / Vitrified tile
- Pavers
- Slate
- Quarry tile
- Marble
- Mosaics
- Stone

Advantages


- Stain free
- Colour fast
- Easy to install and clean
- Water cleanable when fresh
- Non-cracking or powdering
- Anti-bacterial and ant-fungal
- Chemical and temperature resistant
- Available in range of 50 colours

Note :

1. Marvel Linum Epoxy are available in range of 30 colours.
2. Sparkle Linum Epoxy are available in range of 20 colours.



Marvel Series



001 Bright White




004 Almond



011 Sandstone



016 Burgundy



019 Slate Grey




023 Raven



027 Sable



030 Sierra Sunrise



033 Saltillo



038 Spectra Pink



002 Quarry Red




007 Dusty Rose



013 Midnight Black



017 Light Green



020 Natural Grey



025 Canyon Red



028 Hemp



031 Inca Gold



034 Aqua Blue



039 Lemon Yellow



003 Silk (Ivory)



008 Parchment



014 Mocha



018 Silver Shadow



022 Platinum



026 Mayan Red



029 Ivy



032 Sage




035 Sapphire



042 Italian TeraCotta

Sparkle Series




501 Light Wheat Gold




502 Amazon Red Gold



503 Dark Chocolate Gold



504 Spring Green Gold



505 Ash Grey Gold



506 Serene Black Gold



507 Majestic Sunrise Gold



601 Majestic Sunrise Silver



602 Majestic red Silver



603 Dark Chocolate Silver



604 Light Wheat Silver



605 Ash Grey Silver



606 Serene Black Silver




607 Ocean Blue Silver



701 Light Wheat Copper



702 Amazon Red Copper




703 Dark Chocolate Copper



704 Desert Sand Copper



705 Ash Grey Copper



706 Serene Black Copper



Linum Ceramic

8-A, National Highway, Lalpar, Morbi - 363 642, (Gujarat) India.

Customer Care : +9181538 00076

E : info.linumceramic@gmail.com



www.linumceramic.com